

### Two Synchro/Resolver Measurement and One Optional Reference Supply

#### FEATURES

- Direct replacement for all standard API Model 8810's
- High resolution Touch-Screen, Front Panel "jog wheel" or Front Panel USB mouse input for control / setup
- Two isolated Input Channels
- 0.0001° Resolution
- $\pm 0.004^\circ$  Accuracy (Optional  $\pm 0.0015^\circ$ )
- LXI compatible
- Programmable display options
- Auto-ranging Signal and Reference
- 47 Hz to 20 KHZ Frequency Range
- DC rate or angle output
- Auto Phase Correction
- Optional 2.2 VA internal Reference
- Measures and displays Reference Voltage, frequency, and VL-L
- Ethernet, USB, IEEE-488 and parallel ports
- CE compliant



#### DESCRIPTION

The 8810A is a rack mount or bench top API featuring front panel controls (including touch screen display) and input terminals. This self-calibrating unit is furnished with factory installed rubber feet and foldaway tilt stand, and can also be installed in a 3.5" half rack slot. Using optional rack mounting brackets, the 8810A may be installed as a single unit in a full rack slot or as a tandem mount of two units in a full rack slot.






This second generation API truly represents a major step forward in Synchro-to-digital conversion technology. The use of an intelligent DSP design eliminates push buttons and allows all programming to be done either via an integrated touch-screen, front panel USB optical mouse interface or with the multi-purpose increment/setup knob. In addition, IEEE-488, Ethernet, and USB 2.0 interfaces have been added to extend remote operation capabilities. The display can be set for one of three display modes; 0-360°,  $\pm 180^\circ$ , or Degrees, Minutes, Seconds. A wide frequency range (47 Hz to 20 KHz) is standard.

Improved flexibility is provided by two fully independent inputs that can be used to simultaneously read two separate input signals, or can be combined to measure multi-speed Synchros or Resolvers. The gear ratio, for the two-speed mode, is programmable from 2:1 to 255:1. Built-in phase correction eliminates errors caused by quadrature and harmonics when reference and signal are out of phase by as much as 60°.

The 8810A automatically accepts and displays input voltages from 1.0 to 90  $V_{L-L}$  and Reference voltages from 2 to 115 Vrms over a broad frequency range of 47 Hz to 20 KHz. Therefore, one Instrument can handle most Synchro and Resolver measurement requirements.

The 8810A is a drop-in replacement for all variations of the previously supplied standard North Atlantic Industries Model 8810. For special versions (P/N = 8810 –Sxxxx), contact factory to determine compatibility.

**Optional Reference:** This design can also incorporate a 2.2 VA programmable reference generator that is used for stand alone applications (See P/N)

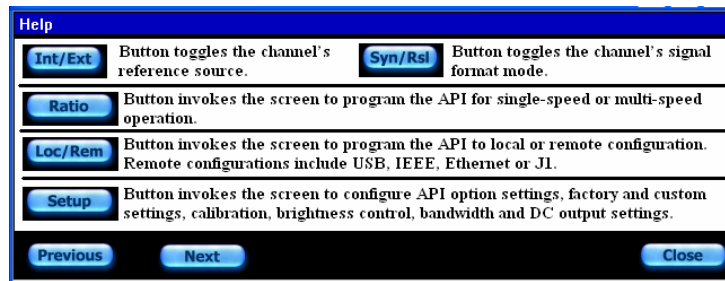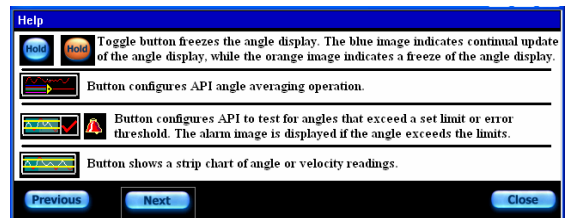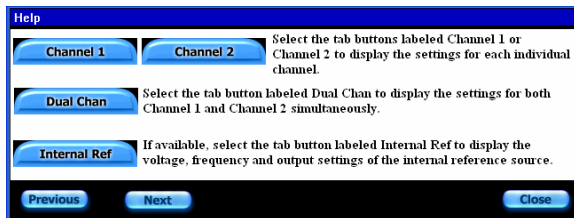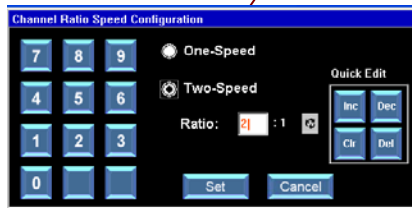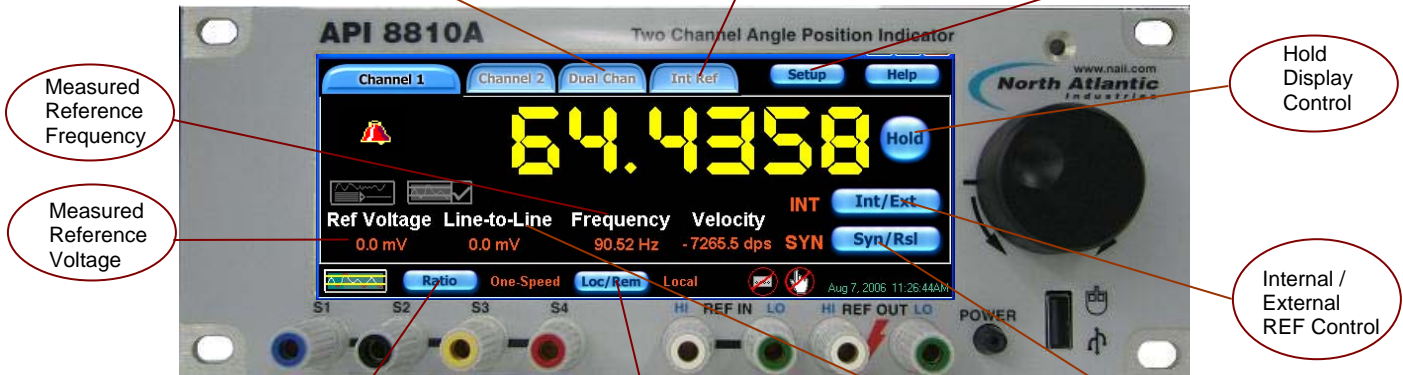



## SPECIFICATIONS

| Resolution:                           | 0.0001°   |                             |                             |          |    |          |    |             |    |              |    |            |     |
|---------------------------------------|---|-----------------------------|-----------------------------|----------|----|----------|----|-------------|----|--------------|----|------------|-----|
| Input Channels:                       | 2 separate isolated Inputs  |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Signal Inputs:                        | Ch.1: Synchro/Resolver programmable; 1 - 90VL-L auto-ranging<br>Ch.2: Synchro/Resolver programmable; 1 - 90VL-L auto-ranging<br>Each channel measures the Input VL-L, Reference voltage and frequency. Data is displayed on the front panel and also available via various digital outputs.   |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Accuracy:                             | See detailed Accuracy Specifications below.   |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Frequency Range:                      | 47 Hz – 20 kHz. See detailed Accuracy Specifications below.   |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Angular Range:                        | 0.0000°-359.9999° or ±179.9999° programmable, or output angle can be viewed in degrees, minutes and seconds   |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Two-speed mode:                       | Both inputs can be combined with a ratio from 2 to 255  |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Reference Voltage:                    | 2V to 115 V auto-ranging  |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Reference Frequency:                  | 47 Hz – 20 kHz  |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Input Impedance:                      | <table border="0"> <thead> <tr> <th><u>Input Signal (V L-L)</u></th> <th><u>Input Impedance (kΩ)</u></th> </tr> </thead> <tbody> <tr> <td>1 to 3 V</td> <td>47</td> </tr> <tr> <td>3 to 6 V</td> <td>55</td> </tr> <tr> <td>6 to 11.8 V</td> <td>58</td> </tr> <tr> <td>11.8 to 26 V</td> <td>60</td> </tr> <tr> <td>26 to 90 V</td> <td>200</td> </tr> </tbody> </table> | <u>Input Signal (V L-L)</u> | <u>Input Impedance (kΩ)</u> | 1 to 3 V | 47 | 3 to 6 V | 55 | 6 to 11.8 V | 58 | 11.8 to 26 V | 60 | 26 to 90 V | 200 |
| <u>Input Signal (V L-L)</u>           | <u>Input Impedance (kΩ)</u>   |                             |                             |          |    |          |    |             |    |              |    |            |     |
| 1 to 3 V                              | 47  |                             |                             |          |    |          |    |             |    |              |    |            |     |
| 3 to 6 V                              | 55  |                             |                             |          |    |          |    |             |    |              |    |            |     |
| 6 to 11.8 V                           | 58  |                             |                             |          |    |          |    |             |    |              |    |            |     |
| 11.8 to 26 V                          | 60  |                             |                             |          |    |          |    |             |    |              |    |            |     |
| 26 to 90 V                            | 200   |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Tracking Speed:                       | 2.76 rps. At 60 Hz<br>4.68 rps. At 360 Hz or higher   |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Settling Time:                        | 1.5 s max. for 180° step change (Based on Bandwidth selected)<br>3.0 s max. at 47-66 Hz (Based on Bandwidth selected)   |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Phase Correction:                     | Automatically corrects for up to a 60° phase shift between stator and rotor   |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Velocity or DC angle for Ch.1 & Ch.2: | ±1000 °/sec = ±10 VDC<br>±100 °/sec = ±10 VDC<br>0 to 359.99° = 0 -10 VDC<br>±179.99° = ±10 VDC   |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Band width:                           | Automatically set based on frequency of input, up to a max of 100 Hz BW. User can change this parameter as desired, over a range of 6 to 1200 Hz BW.  |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Data averaging:                       | Selectable from 10 ms to 10 seconds   |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Converter Busy:                       | TTL compatible pulses, 1µs wide nom. Pulses present when tracking.  |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Digital Output:                       | 6 decade BCD (1-2-4-8) 10 TTL loads   |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Serial Interfaces:                    | Ethernet, USB, and IEEE-488, and legacy 50 pin connector  |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Temperature Range:                    | 0-50°C operating  |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Input Power:                          | 85 Vrms to 265 Vrms, 47 to 440 Hz, < 20 Watts   |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Weight:                               | 4 lbs.  |                             |                             |          |    |          |    |             |    |              |    |            |     |
| Dimensions:                           | 12.5" L x 9.5" W x 3.5" H   |                             |                             |          |    |          |    |             |    |              |    |            |     |

## REFERENCE GENERATOR SPECIFICATIONS (OPTIONAL, SEE PART NUMBER)

|                     |   |
|---------------------|---|
| Voltage Output:     | 2 Vrms to 115 Vrms, Programmable with a resolution of 0.1 V <ul style="list-style-type: none"> <li>• 2.0 to 9.9 Vrms / 47 Hz to 20 KHz frequency range</li> <li>• 10.0 to 27.9 Vrms / 47 Hz to 4 KHz frequency range</li> <li>• 28.0 to 115.0 Vrms / 47 Hz to 800 Hz frequency range</li> </ul> |
| Accuracy:           | ±3% of setting  |
| Harmonic Content:   | 2.0% maximum  |
| Output Drive:       | 2.2 VA (See Operation manual for detail description of Output Drive)  |
| Output Protection:  | Over-current and over-temperature   |
| Frequency:          | 47 Hz to 20 kHz Programmable with 0.1 Hz steps  |
| Frequency accuracy: | 0.1% FS   |



## DETAILED ACCURACY SPECIFICATIONS

**NOTE: SPECIFICATIONS APPLY AFTER A 15 MINUTE WARMUP AND CALIBRATION**

| <b>Accuracy: 8810A</b>         |                    |  |
|--------------------------------|--------------------|--|
| Resolver mode: 2.0 to 28 VL-L  | ±0.004°            | from 47 Hz to 5 KHz                    |
| Resolver mode: 28 to 90 VL-L   | ±0.004°            | from 47 Hz to 1 KHz                    |
| Resolver mode: 2.0 to 12 VL-L  | ±0.004° to ±0.008° | from 5 KHz to 10 KHz derated linearly  |
| Resolver mode: 2.0 to 12 VL-L  | ±0.008° to ±0.015° | from 10 KHz to 15 KHz derated linearly |
| Resolver mode: 2.0 to 12 VL-L  | ±0.015° to ±0.02°  | from 15 KHz to 20 KHz derated linearly |
| Resolver mode: 1.0 to 2.0 VL-L | ±0.006°            | from 47 Hz to 5 KHz                    |
| Resolver mode: 1.0 to 2.0 VL-L | ±0.006° to ±0.015° | from 5 KHz to 10 KHz derated linearly  |
| Resolver mode: 1.0 to 2.0 VL-L | ±0.015° to ±0.025° | from 10 KHz to 15 KHz derated linearly |
| Resolver mode: 1.0 to 2.0 VL-L | ±0.025° to ±0.035° | from 15 KHz to 20 KHz derated linearly |
| Synchro mode: 2.0 to 90 VL-L   | ±0.004°            | from 47 Hz to 1 KHz                    |

| <b>Accuracy: 8810AH</b>        |                     |  |
|--------------------------------|---------------------|--|
| Resolver mode: 2.0 to 28 VL-L  | ±0.0015°            | from 47 Hz to 5 KHz                    |
| Resolver mode: 28 to 90 VL-L   | ±0.002°             | from 47 Hz to 1 KHz                    |
| Resolver mode: 2.0 to 12 VL-L  | ±0.0015° to ±0.005° | from 5 KHz to 10 KHz derated linearly  |
| Resolver mode: 2.0 to 12 VL-L  | ±0.005° to ±0.01°   | from 10 KHz to 15 KHz derated linearly |
| Resolver mode: 2.0 to 12 VL-L  | ±0.010° to ±0.015°  | from 15 KHz to 20 KHz derated linearly |
| Resolver mode: 1.0 to 2.0 VL-L | ±0.0025°            | from 47Hz to 5 KHz                     |
| Resolver mode: 1.0 to 2.0 VL-L | ±0.0025° to ±0.01°  | from 5KHz to 10 KHz derated linearly   |
| Resolver mode: 1.0 to 2.0 VL-L | ±0.010° to ±0.02°   | from 10 KHz to 15 KHz derated linearly |
| Resolver mode: 1.0 to 2.0 VL-L | ±0.02° to ±0.03°    | from 15 KHz to 20 KHz derated linearly |
| Synchro mode: 2.0 to 28 VL-L   | ±0.0015°            | from 47 Hz to 1 KHz                    |
| Synchro mode: 28 to 90 VL-L    | ±0.0025°            | from 47 Hz to 1 KHz                    |

## CALIBRATION

When unit is turned on it will automatically initiate calibration. After warm-up of 15 minutes, unit will again automatically calibrate the channel or channels being used. Once calibrated, unit will monitor usage. For a comprehensive description of the calibration function, refer to the 8810A Operations Manual, Appendix "D".



## INTERFACES

The 8810A is available with several different interfaces for ATE applications. Interfaces include, Ethernet, USB, IEEE-488, and a legacy 50 pin connector for API parallel BCD outputs. The legacy 50 pin connector and the IEEE-488 are both 100% backwards compatible with the model 8810. Below is information, for each interface. Detail programming commands / information are included in “**8810A Programmer’s Reference Guide.**” The Ethernet connector and the USB connector, J3, are industry standard connections.

### J1 CONNECTOR, API PARALLEL PIN DESIGNATIONS

DD50P, Mate DD50S or equivalent

| Pin | Designation             | Pin | Designation              | Pin | Designation     | Pin | Designation                  | Pin | Designation              |
|-----|-------------------------|-----|--------------------------|-----|-----------------|-----|------------------------------|-----|--------------------------|
| 1   | Do Not Use <sup>1</sup> | 11  | Converter busy           | 21  | S1 Ch. 2        | 31  | 0.4°                         | 41  | DC out Ch.1 <sup>2</sup> |
| 2   | Do Not Use <sup>1</sup> | 12  | 0.04°                    | 22  | S2 Ch. 2        | 32  | 2 deg. (BCD)                 | 42  | Data Freeze              |
| 3   | Chassis ground          | 13  | 0.01°                    | 23  | S3 Ch. 2        | 33  | 8 deg. (BCD)                 | 43  | Remote Ch. select        |
| 4   | Digital ground          | 14  | 0.8°                     | 24  | S4 Ch. 2        | 34  | Do Not Use                   | 44  | 0.004° or 0.005° for     |
| 5   | S1 Ch. 1                | 15  | 0.2°                     | 25  | R1 Ch.2 Ref Hi  | 35  | Do Not Use                   | 45  | 20 deg. (BCD)            |
| 6   | S2 Ch. 1                | 16  | 4°                       | 26  | R2 Ch. 2 Ref LO | 36  | Reference Out Hi             | 46  | 40 deg. (BCD)            |
| 7   | S3 Ch. 1                | 17  | 1°                       | 27  | Not Data Freeze | 37  | Reference Out Lo             | 47  | 80 deg. (BCD)            |
| 8   | S4 Ch. 1                | 18  | Do Not Use               | 28  | 0.02°           | 38  | 0.008°                       | 48  | 10 deg. (BCD)            |
| 9   | R1 Ch. 1 Ref HI         | 19  | DC out Ch.2 <sup>2</sup> | 29  | 0.08°           | 39  | 0.002 °                      | 49  | 100 deg. (BCD)           |
| 10  | R2 Ch. 1 Ref LO         | 20  | Local/Rem select         | 30  | 0.1°            | 40  | 0.001° or 0.005° for 179.99° | 50  | 200° or + bit for 179.9° |

#### Notes:

- 1- Previous models allowed power input at pins 1 & 2. To meet new safety requirements, power input is ONLY via the Power Entry module.
- 2- DC outputs on pins 19 & 41 are referenced to pin 4, digital ground.

### J2 CONNECTOR, IEEE - 488 PIN DESIGNATIONS

Standard IEEE Interface Connector

| Pin | Designation | Pin | Designation |
|-----|-------------|-----|-------------|
| 1   | DIO1        | 13  | DIO5        |
| 2   | DIO2        | 14  | DIO6        |
| 3   | DIO3        | 15  | DIO7        |
| 4   | DIO4        | 16  | DIO8        |
| 5   | EOI         | 17  | REN         |
| 6   | DAV         | 18  | Gnd., DAV   |
| 7   | NRFD        | 19  | Gnd., NRFD  |
| 8   | NDAC        | 20  | Gnd., NDAC  |
| 9   | IFC         | 21  | Gnd., IFC   |
| 10  | SRQ         | 22  | Gnd., SRQ   |
| 11  | ATN         | 23  | Gnd., ATN   |
| 12  | Shield      | 24  | Gnd., Logic |

### J3 CONNECTOR:

- USB-B (USB 2.0) Rear Connector, for communications only
- Ethernet (10/100/1000 Base-T copper)



## ORDERING INFORMATION

### PART NUMBERS

8810A- \* Standard accuracy  $\pm 0.004^\circ$  (See Detail Accuracy Specifications)  
 └ Add "R" for an internal programmable 2.2 VA Reference Generator

8810AH- \* Optional high accuracy unit  $\pm 0.0015^\circ$  (See Detail Accuracy Specifications)  
 └ Add "R" for an internal programmable 2.2 VA Reference Generator

**NOTE: The 8810A (all models) are IEC compliant**

### ACCESSORIES

Included with the 8810A is an accessory kit NAI part number 8810A-ACCESSORY-KIT.  
 Kit includes the following items:


| Description                     | NAI P/N  |
|---------------------------------|----------|
| 50 Pin Mating connector for J1  | 05-0053  |
| Fuse, 5 x 20mm, 2A, slo-blo (2) | 99-0146  |
| Line Cord                       | 202-0002 |

### **Optional Mounting Accessories**

The 8810A can be ordered with mounting adapters for mounting either one or two units in a standard 19-inch equipment rack. The table below describes full rack and tandem full rack mounting accessories.

| Type of Mount                      | Description  | NAI P/N |
|------------------------------------|--|---------|
| Full Rack Mounting                 | Mounts one unit in 19-inch rack                                    | 783893  |
| Tandem Full Rack Mounting ½ height | Mounts two units side by side in 19-inch rack (3-1/2" rack height) | 548557  |

## MECHANICAL OUTLINE, MODEL 8810A

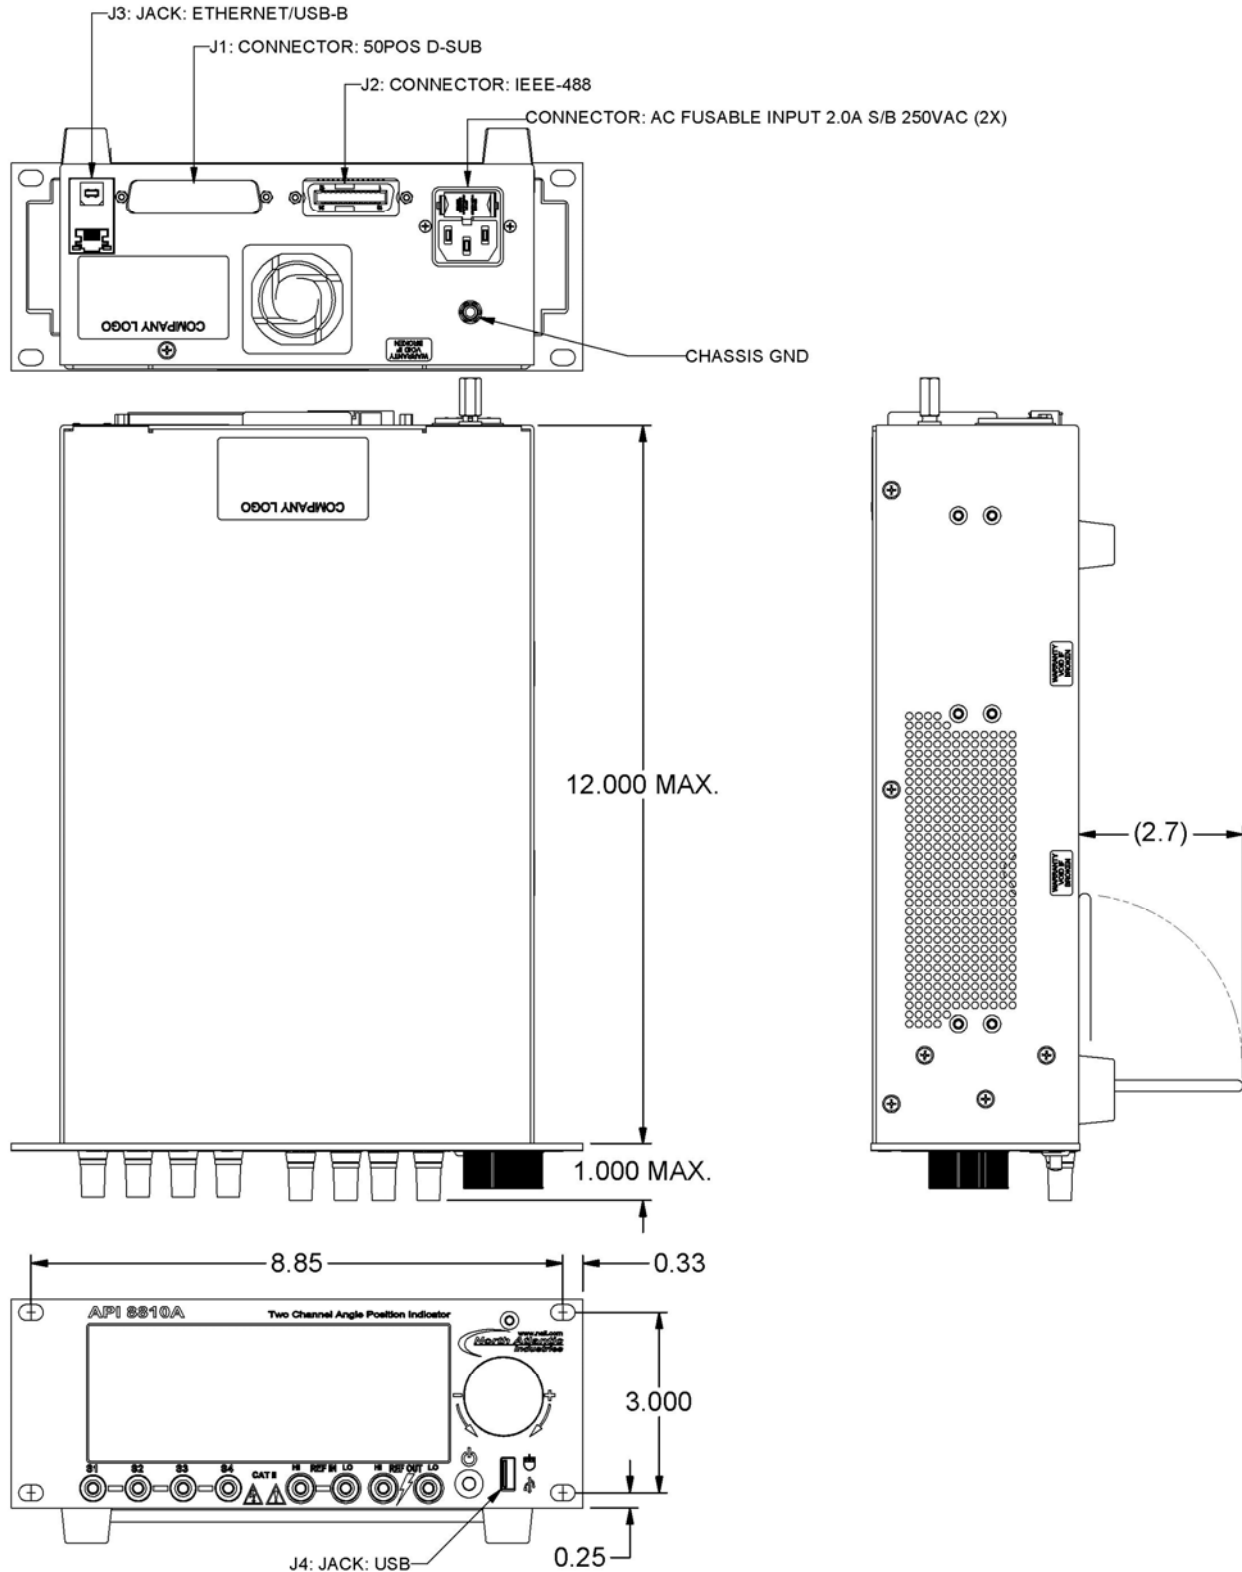

**Note:** J3 USB-B Rear Connector for communications only (USB 2.0).  
J4 USB-A Front Panel Connector for optical mouse only.



## REVISION HISTORY

| Revision | Description of Change   | Engineer | Date      |
|----------|---|----------|-----------|
| A        | Preliminary Release   | FH / as  | 05 DEC 05 |
| A1       | Preliminary Re-release  | FH / as  | 06 JAN 06 |
| B        | Initial Release   | AS       | 10 FEB 06 |
| C        | Corrected discrepancies (Resolution / accuracy) with operations manual  | FR       | 30 JUN 06 |
| D        | Restated accuracy specifications pg 1 & pg 3, changed operating temp. to 50 deg C max. added high accuracy P/N 8810AH   | FR       | 18 JUL 06 |
| E        | Updated all screen shots to latest actual units, added additional connector interface information, added Mechanical outline drawing, modified Title of document, changed file name from "8810A-B001 revX" to from "8810A-A001 revX" for consistency.  | FR       | 07 AUG 06 |
| F        | Corrected Tilt stand information (standard, not optional)   | FR       | 08/11/06  |
| F1       | Deleted mouse as a purchase option, changed Ref. Generator output to 1.2VA  | FR       | 08/22/06  |
| F2       | New Address   | KL       | 04/25/07  |
| F3       | Edited accuracy specifications pg 1 & 3, changed Band Width statement pg.3, added page after "SPECIFICATIONS" with Accuracy Tables for "A" & "AH" models & added CALIBRATION statement. Edited Part numbers re: accuracy. Changed power output rating for Optional reference from 1.2 VA to 2.2 VA on pgs 1, 3 & 6. | FR       | 09/27/07  |
| F4       | Added   compliant statement to page 1 & 6.  | FR       | 10/09/07  |
| F5       | Corrected minor typo. errors pages 1,3 & 4, added note re: Reference Output Drive details.  | FR       | 10/11/07  |
| G        | Added REF frequency characterization for voltage output, changed max REF harmonic content from 1% to 2% (Reference Generator Specifications pg.3).  | AS       | 11/07/07  |
| H        | Updated 3 screen shots on page 2 (Dual Ch., Int. Ref. & Loc./Remote). Updated "Mechanical Outline" drawing on pg. 7.  | FR       | 1/02/08   |
| H1       | Added Input Impedance table   | FR       | 6/9/08    |
| H2       | Reformatted Document, revised Bandwidth spec, added note to J1 connector table  | FR       | 6/26/08   |