

# MXC-4000 Series

Intel® Atom™ Dual-Core Fanless Expandable Embedded Computer with PCI/PCIe Slots



## Introduction

The Matrix MXC-4000 series is a fanless, expandable embedded computer based on the Intel® Atom™ D510 dual-core processor to offer greater computing power for your applications. The MXC-4000 inherits its exceptional fanless and cable-less design from existing Matrix C series, with the addition of innovative features, such as an eSATA interface, a LVDS output, and a hot-pluggable fan option.

The MXC-4000 series features an Intel® Atom™ D510 dual-core 1.66 GHz processor to boost its performance to almost twice that of the Atom™ N270 platform, while maintaining the same overall power consumption. Its PCI and PCIe slots give you the possibility to integrate off-the-shelf PCI/PCIe cards and develop a configurable application platform. Built-in isolated DIO channels are provided for general industrial control. Its LVDS output on the front panel allows you to directly connect to a LCD panel. The MXC-4000 series also provides two eSATA ports to enable the capability of either expanding storage capacity or using hot-swappable SATA drives.

Leveraging a reliable fanless and durable cable-less design, the MXC-4000 series exhibits excellent dependability in harsh environments, where severe temperature variation and vibration may exist. The MXC-4000 series provides an optional hot-pluggable fan module to dissipate heat generated within the system when high power consumption PCI/PCIe cards are installed. This ingenious mechanical design retains a cable-less structure which dramatically improves thermal stability when PCI/PCIe cards installed.

Combining a reliable design with more computing power and innovative features, the Matrix MXC-4000 series is the optimal choice to base your rugged application system on.

## Features

- Intel® Atom™ D510 1.66 GHz processor + ICH8-M chipset
- Configurable, providing PCI and PCIe slots
- Rugged, -10°C to 60°C fanless operation\*
- Built-in 9 Vdc to 32 Vdc wide-range DC power input
- VGA + LVDS independent dual display
- Dual 1000/100/10 Mbps Ethernet ports
- Two RS-232 ports and two software-selectable RS-232/422/485 ports
- Two eSATA ports for storage expansion
- Built-in I2-CH isolated DI and I2-CH isolated DO

## Applications

- Machine Automation
- Intelligent Transportation
- Factory Control
- Test Instrumentation
- Safety Surveillance
- Building Automation

## Software Support

- Windows® XP / XP Embedded / 7, Linux\*
- \*Linux Distribution by Request

## ■ Easy-to-install Hot-pluggable Fan Module



1. Undo the thumbscrew by hand




2. Withdraw the thumbscrew and remove the top cover



3. Replace it by plugging the hot-pluggable fan module cover into the fan connector on CPU board

## ■ MXC-4000 Series Front Panel

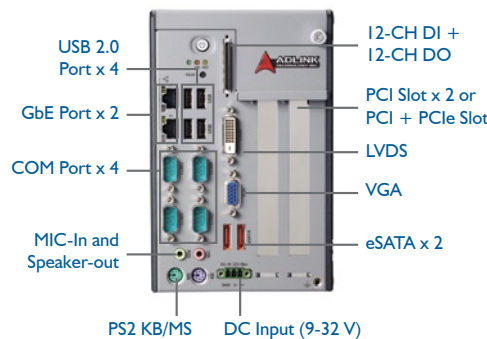

## ■ Inside of the MXC-4000 Series



2 PCI Slots for MXC-4002 D / 1 PCI Slot + 1 PCIe Slot for MXC-4011 D

\*Extending the operating temperature to -10°C to +60°C is optional and requires use of an industrial solid-state drive storage device. Heat dissipation from inserted PCI/PCIe cards may affect thermal performance.

## Specifications

Model Name	MXC-4002D	MXC-4011D
<b>System Core</b>		
■ Processor	Intel® Atom™ D510 1.66 GHz Dual-Core CPU	
■ Chipset	Intel® I/O Control Hub 8 Mobile (ICH8-M)	
■ Video	Analog CRT, supports QXGA (2048 X 1536) resolution 18-bit LVDS output by DVI-D connector for LCD panel	
■ Memory	1 GB DDR2 667 MHz SODIMM module	
<b>I/O Interface</b>		
■ Expansion Slots	2 PCI slots	1 PCI slot and 1 PCIe x1 slot
■ Ethernet	2 GbE ports (Intel® 82574L)	
■ DIO	12-CH isolated DI + 12-CH isolated DO	
■ Serial Port	2 software-programmable RS-232/422/485 (COM1 & COM2) 2 RS-232 (COM3 & COM4)	
■ USB	4 USB 2.0 ports	
■ Audio	1 mic-in and 1 line-out	
■ KB/MS	1 PS/2 keyboard and 1 PS/2 mouse	
<b>Power Supply</b>		
■ DC Input	Built-in 9-32 Vdc wide-range DC input with over-voltage protection 3P pluggable connector with latch (GND, V-, V+)	
■ AC Input	Optional 60 W external AC-DC adapter for AC input	
<b>Storage Device</b>		
■ SATA HDD	On-board SATA port for 2.5" HDD/SSD installation	
■ eSATA	2 eSATA interface connectors for external storage expansion	
■ CompactFlash	1 type II CF socket, supporting PIO and DMA modes for HDD replacement	
<b>Mechanical</b>		
■ Optional Fan Module	Optional, hot-pluggable fan module for dissipating heat generated by PCI/PCIe card	
■ Dimensions	118 mm (W) x 219 mm (D) x 183 mm (H) (4.6" x 8.6" x 7.2")	
■ Weight	2.8 kg (6.17 lbs)	
■ Mounting	Wall-mount kit	
<b>Environmental</b>		
■ Operating Temperature*	Standard: 0°C to 55°C (w/HDD) Extended option: -10°C to 60°C (w/industrial SSD)	
■ Storage Temperature	-40°C to 85°C (excl. HDD/SSD/CF)	
■ Humidity	~95% @ 40°C (non-condensing)	
■ Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/ CF or SSD) Operating, 0.5 Grms, 5-500 Hz, 3 axes (w/ HDD)	
■ Shock	Operating, 50 G, half sine 11 ms duration (w/ CF or SSD)	
■ EMC	CE and FCC Class A	

\*Without PCI/PCIe card installation

## Ordering Information

Model Name	Description	PCI	PCIe x1	GbE	eSATA	COM	USB	Memory	DIO
MXC-4002D	Intel® Atom™ D510 fanless expandable embedded computer	2	0	2	2	4	4	1 GB DDR2	12 DI+ 12 DO
MXC-4011D	Intel® Atom™ D510 fanless expandable embedded computer	1	1	2	2	4	4	1 GB DDR2	12 DI+ 12 DO

## Optional Accessories

MXC-4000 Optional Fan Module	Hot-pluggable fan module for the MXC-4000 series
2 GB DDR2 Upgrade	Upgrade to 2 GB DDR2 memory
320 GB HDD Option	Factory-installed 320 GB SATA hard disk drive (0 to 60°C)
32 GB SSD Option	Factory-installed 32 GB SATA solid-state drive (0 to 70°C)
8 GB Industrial SSD Option	Factory-installed 8 GB industrial-grade SATA solid-state drive (-40 to 85°C)
80 W AC-DC Adapter	80 W industrial-grade AC-DC adapter (-20 to 70°C)
Extended Temperature Option*	Optional Screening to extend the operating temperature of the MXC-4000 series to -10°C to 60°C

\*This option guarantees cold boot of the system at -10°C and operation with 100% loading at 60°C. The industrial solid-state drive storage option is required.