

# EOS-4000

## 2-CH Camera Link (PoCL) Embedded Vision System with 3rd Generation Intel® Core™ i5/i7 Processor



### Introduction

ADLINK's EOS-4000 is a rugged, compact embedded vision system, with 3rd Generation Intel® Core™ i5/i7 processor, dual independent PoCL (power over Camera Link) ports with data transfer up to 2.56 Gb/s, and pixel clock rates up to 85 MHz for high speed capture of large images. Computing power and connectivity are significantly enhanced, with minimal footprint.

The EOS-4000 supports a 2-CH PoCL Camera Link® base configuration, reducing cabling burdens and eliminating the need for external power adapters. In addition, the EOS-4000 supports 64-bit memory addressing, benefiting large address space vision applications.

The EOS-4000's rich I/O capability includes trigger and encoder input and two independent RS-232 serial communication ports, reducing host computer loading. 64 isolated digital I/O connectors, digital filter, dual storage, internal USB port, and 1 kbit programmable EEPROM all ideally equip the EOS-4000 to integrate, deploy, and manage copy protection or authentication of software licenses for system development, further accelerating time to market.

Combining increased computing power with multi-channel connectivity and a ready-to-deploy application platform, the EOS-4000 delivers embedded vision ideally suited for high-speed and large image machine vision applications.

### Features


- Compact, rugged system design
- Embedded 3rd Gen Intel® Core i5/i7 Quad Core CPU
- 2-CH PoCL, base Camera Link® configuration
- One internal USB port and 1kbit EEPROM
- RAID system (Dual SATA interface)
- 64-CH isolation DI/O with digital filter
- Support for wall and DIN rail mounting (optional)
- Hardware monitoring of temperature, voltage, and watchdog timer

### Applications

- Industrial automation
- Robot guidance
- 3D vision
- Medical imaging

### Software Support

- OS Information
  - Windows® 7, Embedded Standard 7

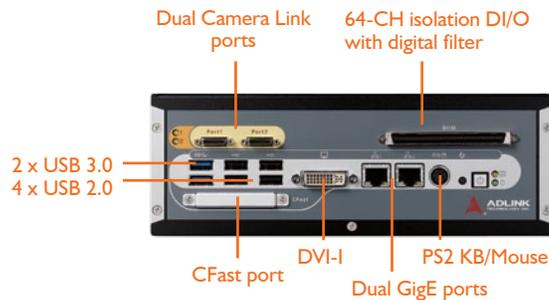

## Specifications

■ CPU	Intel® Core™ i7-3610QM, i5-3610ME
■ Chipset	Intel® QM67 Express
■ System Memory	DDR3 SODIM x2, up to 16 GB
■ Video	VGA+DVI-D output by DVI-I connector, up to QXGA (2048 x 1536) resolution
■ Ethernet	2x GbE port
■ USB	4x external USB 2.0, 2x external USB 3.0, 1 x internal USB 2.0
■ EEPROM size	1 kbit programmable EEPROM
■ COM Ports	Two software-programmable RS-232/422/485 (COM1 & COM2), two RS-232 (COM3 & COM4)
■ Keyboard/Mouse	PS/2 type mini-DIN connectors
■ Camera Interface	2-CH Camera Link base configuration, up to 85 MHz
■ Digital I/O	32 DI, 32 DO COS interrupt for all digital input 2.5 kV isolation protection Configurable Digital Filter (0.25 μs-131 ms)
■ Trigger I/O	2 trigger input, 1 encoder input
■ Weight	3 kg (6.6 lbs)
■ Mounting	Wall and DIN rail mounting (optional)
■ Power Supply	DC: 10 to 30 VDC, ATX mode
■ Operating Temp.	0°C to 55°C (32°F to 122°F)
■ Humidity	0% to 90%
■ Dimensions	230 (W) x 206 (D) x 82 (H) mm (9 x 8.3 x 3.2 in.)
■ Power Consumption	110 W (with 4 GB DDRAM and 4 GB CFAST)
■ Storage	One CFAST slot, two 2.5" SATA interfaces
■ Random Vibration	Operating, 5 Grms, 5-500 Hz, 3 axes (w/CFAST or SSD)
■ Safety Compliance	CE/FCC, RoHS

## Ordering Information

- **EOS-4000/M4G**  
2-CH PoCL embedded vision system equipped with Intel Core i5-3610ME  
2.7 GHz processor and 4 GB RAM
- **EOS-4000/M4G/HDD500G**  
2-CH PoCL embedded vision system equipped with Intel Core i5-3610ME  
2.7 GHz processor and 4 GB RAM, and 500 GB HDD
- **EOS-4010/M4G**  
2-CH PoCL embedded vision system equipped with Intel Core i7-3610QM  
2.3 GHz processor and 4 GB RAM
- **EOS-4010/M4G/HDD500G**  
2-CH PoCL embedded vision system equipped with Intel Core i7-3610QM  
2.3 GHz processor and 4 GB RAM, and 500 GB HDD

## Optional Accessories

- **32 GB SSD option**  
Factory-installation of 32 GB SATA solid state drive (0 to 70°C)
  - **4 GB CFAST option**  
Factory-installed 4 GB CFAST card (0 to 70°C)
  - **150 W AC adapter**  
150 W industrial-grade AC adapter (-20 to 70°C)
  - **DIN rail kit**  
DIN rail mount kit
- 
- Cabling**
- **COM port cable**  
DSUB 62-pin male to 4 DSUB 9-pin male cable